



# EMR 1025. High grip, total control.



Test performed by

# Protecting people protecting assets.

Trelleborg's EMR 1025 all-season tire adds extra comfort and safety to snowplowing applications.

With its siped tread pattern and state-of-the-art compound, EMR 1025 delivers higher grip and traction on snow and reduced braking distance, so operators

and machines get the best possible protection.


EMR 1025 offers both the comfort and robustness of the EMR range and delivers high performance year round as a commercial all-season tire. Seasonal changeovers are no longer necessary.


Performance	Regulation
Braking	OCSE code 2 (ISO 6292)
Dynamic Traction	OCSE code 2 adp
Static Traction	OCSE code 2 adp

## Traction Test\* (OCSE CODE2\_ADP)



## Brake Test\* (ISO 6292:2009)

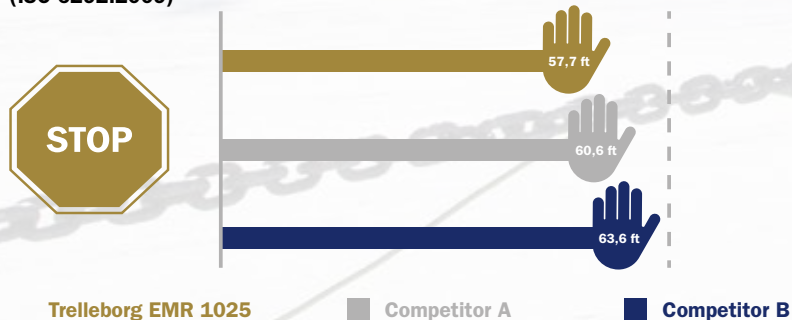

\*Test performed by  LPG  
LAPLAND PROVING GROUND

# EMR 1025 all-season tire.



**ALL-SEASON**



**ALL-STEEL RADIAL  
CONSTRUCTION**



**HIGH GRIP  
ON SNOW**



**EXCELLENT  
RIDE COMFORT**

## Why choose EMR series?



**MAXIMUM VALUE**

Reduced operating cost per hour



**MAXIMUM UPTIME**

Increased productivity, higher traction



**INCREASED SAFETY**

Reduced uncontrolled braking



**REDUCED IMPACT**

Protecting people, protecting assets



EMR 1025

# EMR 1025

PREMIUM RADIAL PNEUMATIC

## LOADER SERVICE

Tire Size	Tread Pattern TRA	Rim Size (Permitted)	Tread Depth (32/nds)	Service Description LI/SS Loader	Tire Load Capacity (lbs) at 6 (mph)	Tire Pressure (psi)
<b>17.5 R 25</b>	L2	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	35	* 176 A2	15,656	65
<b>20.5 R 25</b>	L2	17.00/2.0-25 (17.00/1.7-25)	39	* 186 A2	20,948	65
<b>23.5 R 25</b>	L2	19.50/2.5-25	43	* 195 A2	26,791	65

\*/\*\* - Index of tire strength

## GRADER SERVICE

Tire Size	Tread Pattern TRA	Rim Size (Permitted)	Tread Depth (32/nds)	Service Description LI/SS Grader	Tire Load Capacity (lbs) at 25 (mph)	Tire Pressure (psi)
<b>14.00 R 24</b>	G2	8.00TG-24 (SDC) 10.00VA-24 (SDC)	30	* 153 A8	8,048	54
<b>17.5 R 25</b>	G2	14.00/1.5-25 (14.00/1.5x25 DC, 14.00/1.3x25 DC)	35	* 153 A8	8,048	44
<b>20.5 R 25</b>	G2	17.00/2.0-25 (17.00/1.7-25)	39	* 161 A8	10,198	44
<b>23.5 R 25</b>	G2	19.50/2.5-25	43	* 170 A8	13,230	44

\*/\*\* - Index of tire strength



Yokohama TWS North America, Inc.  
107 Audubon Road - Building 2 - Suite 205  
Wakefield, MA 01880  
800-948-8473  
info.tws@yokohama-tws.com  
www.trelleborg-tires.com/en-us

Follow us

